




Technical description Model BERLIN 1/2

Type: Area-elastic sports floor

Usage: Sports and multi purpose, suitable for floor heating

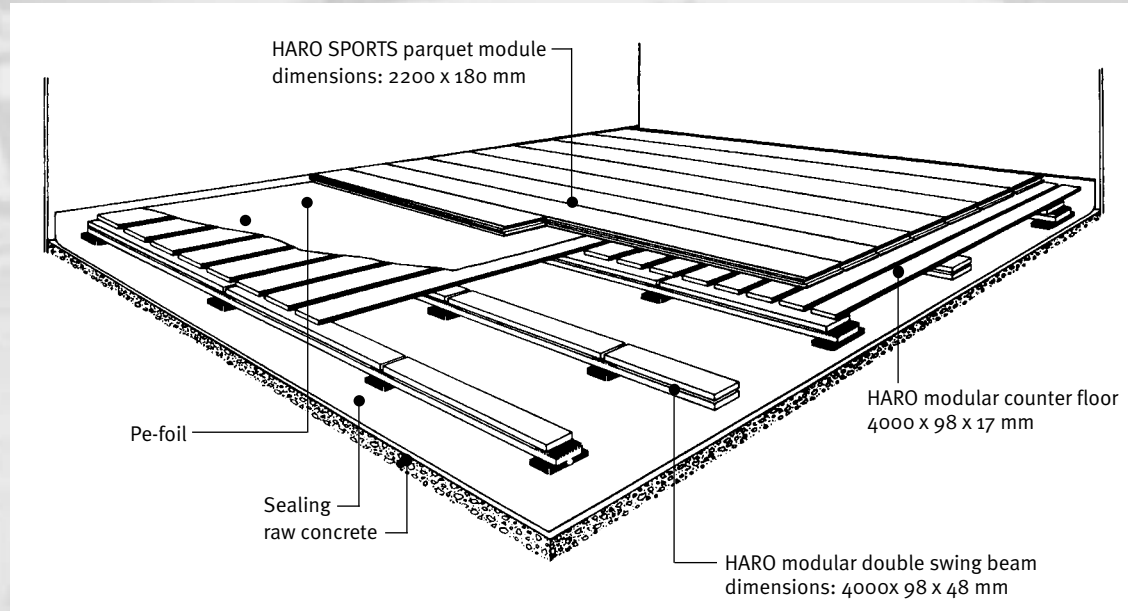

Installation from the top edge of raw concrete	BERLIN	
	Model 1	Model 2
HARO modular double swing beam , laid out in longitudinal direction, consisting of 2 layers made of spruce <ul style="list-style-type: none"> • parallel edged • planed all-over • kiln dried with intermediate webs and pads and supporting bars. Spacing centre to centre: 500 mm	48 mm	
HARO Counter floor module fixed onto the double swing beam Spacing centre to centre: 137 mm	17 mm	
Polyethylene foil , 10% overlapped, loosely laid out	0,03 mm	
Hardwood top layer consisting of HARO sports-parquet , nailed onto the counter floor Solid wood top layer BERLIN 1: 3,6 mm Solid wood top layer BERLIN 2: 5,4 mm Prefactory-sealed with the high wear resistant PERMADUR SEALING	15,6 mm	17,6 mm
Overall height of construction	80,6 mm	82,6 mm

Models BERLIN 1 and 2 meet the DIN V 18032-2 and are subject to the quality control RAL GZ 942.



Hamberger Industrierwerke GmbH
 P.O. 10 03 53 · D-83003 Rosenheim · Germany
 Telephone +49 8031 700-246 · Telefax +49 8031 700-463
 e-mail haro-sports@hamberger.de · Internet www.haro-sports.de