




Technical description Model STOCKHOLM 10

Type: Area-elastic sports floor
Usage: Sports- und multi purpose

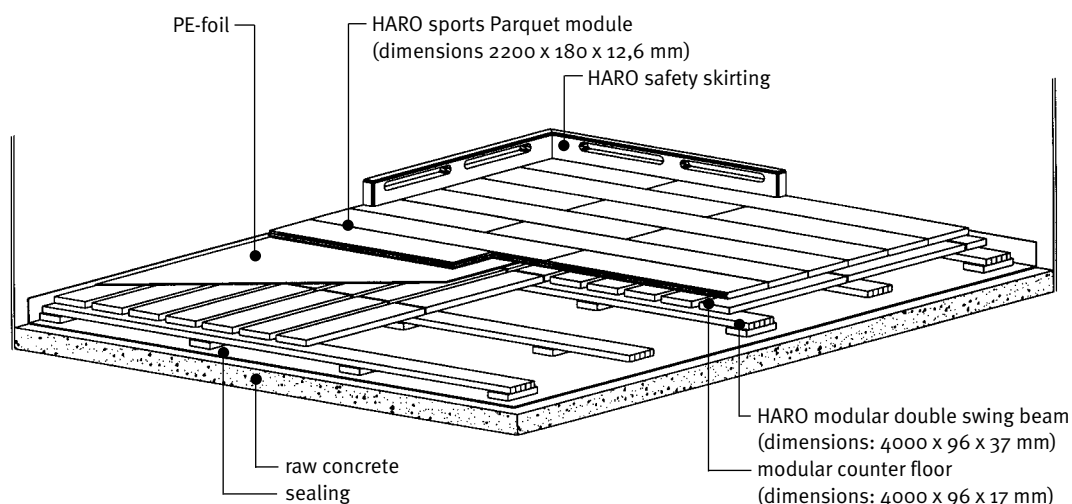

Installation from the top edge of raw concrete	STOCKHOLM Model 10
HARO modular elastic layer made of spruce, consisting of a single batten with pads Spacing centre to centre: 500 mm	37 mm
HARO modular counter floor as load distribution layer fixed onto the elastic batten, sawed at the crossing point. Spacing centre to centre: 137,5 mm The timber is: • kiln dried • planed all-over • parallel edged	17 mm
Polyethylene foil , 10% overlapped, loosely laid out	0,03 mm
HARO sports parquet stapled onto the counter floor module with solid wood on top. Pre-factory sealed with the high wear resistant PERMADUR SEALING.	12,6 mm
Overall height of construction	66,6 mm

Model STOCKHOLM 10 meets the DIN V 18032-2 and is subject to the quality control RAL GZ 942.



Hamberger Industriewerke GmbH
Postfach 10 03 53 · D-83003 Rosenheim · Germany
Telephone +49 8031 700-246 · Telefax +49 8031 700-463
e-mail haro-sports@hamberger.de · Internet www.haro-sports.de