




Technical description Model HELSINKI 10/15

Type: Area-elastic sports floor

Usage: Sports and multi purpose ideal for renovations and refurbishments

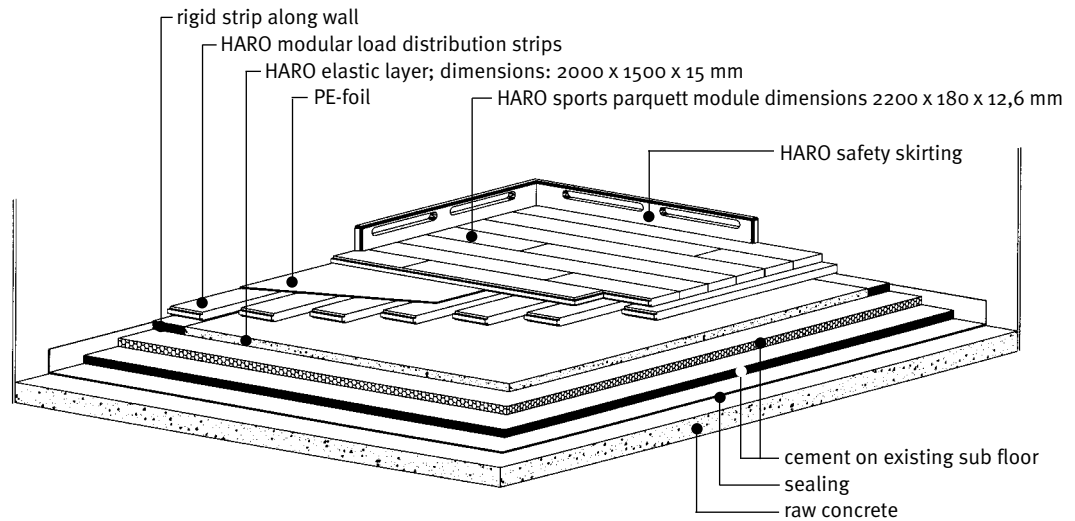

Installation on an even sub-floor according to DIN 18202, part 5 (line 4) or a dry flooring plaster (cement)	HELSINKI	
	Model 10	Model 15
Polyethylene foil, 10 % overlapped, laid out loosely	0,03 mm	
HARO load distribution layer-module, consisting of:		
• Special plywood stripes, length 3000 mm, width 181 mm	12 mm	
• Special OSB-stripes, length 2500 mm, width 181 mm		12 mm
Special elastic layer, joints offset, loosely placed	15 mm	
Hardwood top layer made of HARO sports parquett glued in tongue and groove, fixed onto the load distribution layer		
HARO sports parquett with		
– 3,6 mm or	12,6 mm	12,6 mm
solid wood top layer		
Pre-factory sealed with the high wear resistant PERMADUR SEALING		
Overall height of construction	39,4 mm	

Models HELSINKI 10 and 15 meet the DIN V 18032-2 and are subject to the quality control RAL GZ 942.



Hamberger Industrierwerke GmbH
P.O. 10 03 53 · D-83003 Rosenheim · Germany
Telephone +49 8031 700-492 · Telefax +49 8031 700-249
e-mail haro-sports@hamberger.de · Internet www.haro-sports.de