




# Technical description Model HELSINKI 20/25

Type: Area-elastic sports floor

Usage: Sports and multi purpose ideal for renovations and refurbishments

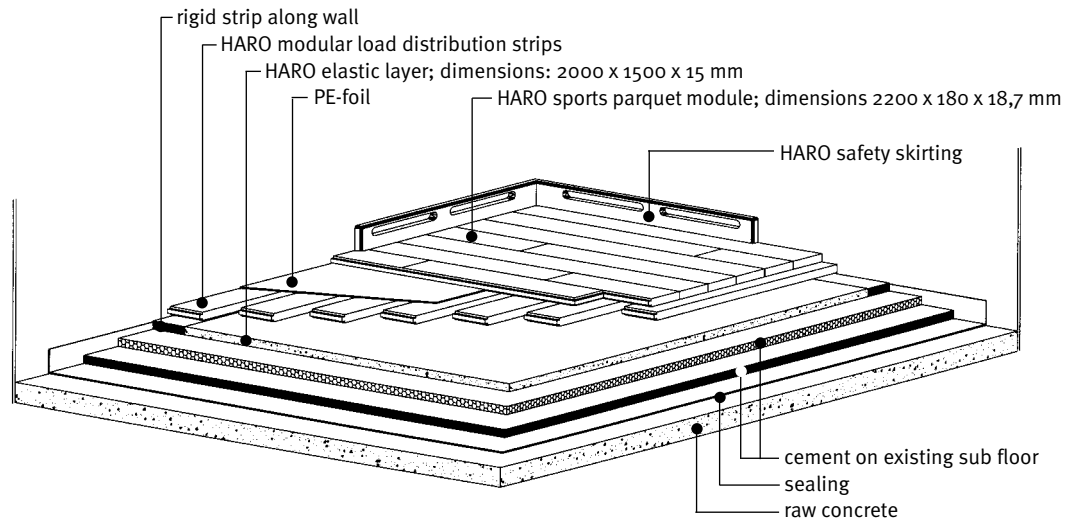

Installation on an even sub-floor according to DIN 18202, part 5 (line 4) or a dry flooring plaster (cement)	HELSINKI	
	Model 20	Model 25
<b>Polyethylene foil,</b> 10 % overlapped, loosely laid out	0,03 mm	
<b>HARO load distribution layer-module,</b> consisting of:		
• Special plywood stripes, length 3000 mm, width 181 mm	12 mm	
• Special OSB-stripes, length 2500 mm, width 181 mm		12 mm
<b>Special elastic layer,</b> joints offset, loosely placed	15 mm	
Hardwood top layer made of <b>HARO sports parquet</b> glued in tongue and groove, fixed onto the load distribution layer		
HARO sports parquet with 5,6 mm solid wood top layer	18,7 mm	18,7 mm
Pre-factory sealed with the high wear resistant PERMADUR SEALING		
<b>Overall height of construction</b>	<b>45,7 mm</b>	

Models HELSINKI 20 and 25 meet the DIN V 18032-2 and are subject to the quality control RAL GZ 942.



Hamberger Industrierwerke GmbH  
P.O. 10 03 53 · D-83003 Rosenheim · Germany  
Telephone +49 8031 700-246 · Telefax +49 8031 700-463  
e-mail haro-sports@hamberger.de · Internet www.haro-sports.de